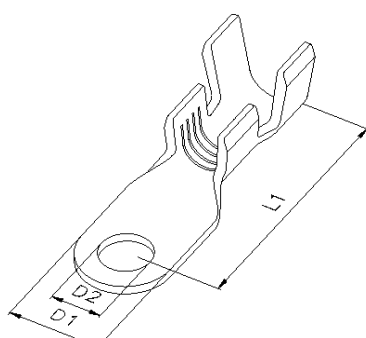
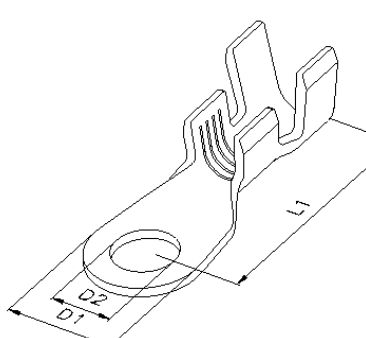


# HS United European Connectors

| Ringkabelschuh   | Artikel-Nr. | Leiter-<br>quer-<br>schnitt | Material | Ober-<br>fläche | L1   | D1  | D2   | Mate-<br>rial-<br>stärke | Verp.-<br>Ein-<br>heit |
|--|-------------|-----------------------------|----------|-----------------|------|-----|------|--------------------------|------------------------|
|  |             | mm <sup>2</sup>             |          |                 | mm   | mm  | mm   | mm                       |                        |
|  <p>Längstransport<br/>* DIN 46 225</p>   | 24.359.110  | 2,5 – 6,0*                  | CuZn     | blank           | 21,3 | 8   | 4,3  | 0,8                      | 3.000                  |
|  | 24.359.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 24.359.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 24.359.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |
|  | 24.356.110  | 4,0 - 6,0                   | CuZn     | blank           | 21,3 | 8   | 4,3  | 0,8                      | 3.000                  |
|  | 24.356.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 24.356.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 24.356.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |
| Ringkabelschuh   | Artikel-Nr. | Leiter-<br>quer-<br>schnitt | Material | Ober-<br>fläche | L1   | D1  | D2   | Mate-<br>rial-<br>stärke | Verp.-<br>Ein-<br>heit |
|  |             | mm <sup>2</sup>             |          |                 | mm   | mm  | mm   | mm                       |                        |
|  <p>Längstransport<br/>* DIN 46 225</p> | 24.361.110  | 2,5 - 6,0                   | CuZn     | blank           | 20,5 | 9,5 | 4,3  | 0,8                      | 3.000                  |
|  | 24.361.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 24.361.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 24.361.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |
|  | 24.358.110  | 4,0 – 6,0                   | CuZn     | blank           | 20,5 | 9,5 | 4,3  | 0,8                      | 3.000                  |
|  | 24.358.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 24.358.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 24.358.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |
|  | 25.361.110  | 2,5 - 6,0*                  | CuZn     | blank           | 20,5 | 9,5 | 5,3* | 0,8                      | 3.000                  |
|  | 25.361.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 25.361.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 25.361.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |
|  | 25.358.110  | 4,0 - 6,0                   | CuZn     | blank           | 20,5 | 9,5 | 5,3  | 0,8                      | 3.000                  |
|  | 25.358.120  |                             | CuZn     | Sn              |      |     |      |                          |                        |
|  | 25.358.310  |                             | CuSn     | blank           |      |     |      |                          |                        |
|  | 25.358.320  |                             | CuSn     | Sn              |      |     |      |                          |                        |